

# G84-LS

## FEATURES & BENEFITS

### Ergonomic design with high pulling force

- Comfortable one-hand operation
- Can be configured for straight (in-line) or pistol grip operation
- Lightweight head assembly weighs only 3.0 pounds
- Compact head design delivers large pulling force in difficult access areas
- Recoil absorbing design reduces shocks transmitted to the user

### Proven tool design

- The G84-LS is a "split" version of the proven Cherry® G84
- Capable of installing the most popular sizes of aircraft lockbolts, blind bolts and rivets
- Pulling force of 5,700 pounds
- Compatible with all Cherry® pulling heads; adaptor kits sold separately
- The low maintenance tool incorporates the traditional simplicity, durability, and reliability of all Cherry® brand tools



## INSTALLATION CAPABILITIES

Installs a wide range of aerospace fasteners\* including:

- Lockbolts – all sizes up to 1/4"
- Blindbolt – all sizes up to 1/4"
- CherryMAX® – all sized up to 1/4"
- Cherry® Rivetless Nut Plate – all sizes

## G84-LS PULLING HEADS\*

Pulling heads for the G84-LS or comparable riveters will fit directly with no adaptation required. For other Cherry mount systems, the following adaptors are required:

| Adapter* | To Adapt to Tool Mounting System |
|----------|----------------------------------|
| 744-500  | Cherry G744 mount                |
| 744-600  | Cherry G704B/747/746A            |
| 744-700  | Cherry G83/84 Bayonet            |

\*May require adaptor. Pulling Heads and adaptors are not furnished with riveter and must be ordered separately.

MAJ : 02-18  
 Vérif. : N.P.L  
 Appr. : C . P

**Distribution OPINDUS**



Matériel conforme à la législation européenne

**OPINDUS** : 1, Rue Maurice Audibert 69800 SAINT PRIEST Tél : 04.78.21.73.14 - Fax : 04.78.21.73.01

# G84-LS

## SPECIFICATIONS

### Weight

Operator Unit 3.0 lbs (1,3 kg)

Total Weight 11.8 lbs (5,35 kg)

### Pulling Force

5700 lbs min @ 110 psi  
 (25,32 kN @ 6,9 bar)


### Piston Stroke

0.53 in (13,5 mm)

### Air Pressure

90 to 110 psi  
 (6,2 bar to 7,6 bar)

**NOTE:** Pulling heads and adaptor kits are not furnished with meter and must be ordered separately

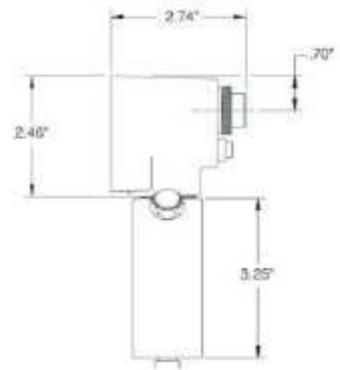

MAJ : 02-18  
 Vérif. : N.P.L  
 Appr. : C . P

**Distribution OPINDUS**



Matériel conforme à la législation européenne

**OPINDUS** : 1, Rue Maurice Audibert 69800 SAINT PRIEST Tél : 04.78.21.73.14 - Fax : 04.78.21.73.01