

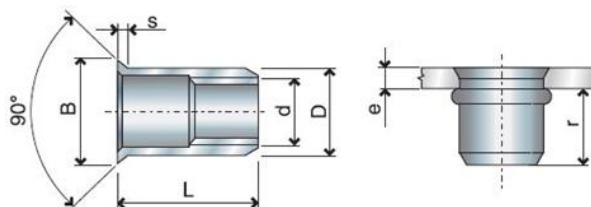





Inserts ou écrous noyés cylindriques en acier FTS-Alu

Tête fraisée avec ancrage sous tête

M4 à M8 Versions courtes et longues



d	Type		r max		D	B	S	L			
M4	M4FTSal/C	1,5 à 3,5	7,4	6	5,9	9	1,5	11	398 kg 3900 N	0,2 kg.m 2,5 N.m	200
	M4FTSal/L	3,5 à 5						13			2500
M5	M5FTSal/C	1,5 à 3,8	8,5	7	6,9	10	1,5	13	601 kg 5900 N	0,5 kg.m 5 N.m	200
	M5FTSal/L	3,8 à 6						15			2500
M6	M6FTSal/C	1,5 à 3,8	10,2	9	8,9	12	1,5	15	877 kg 8600 N	0,8 kg.m 8 N.m	200
	M6FTSal/L	3,8 à 6						17			2500
M8	M8FTSal/C	1,5 à 3,8	11,4	11	10,9	14	1,5	16,5	1040 kg 10200 N	2 kg.m 20 N.m	200
	M8FTSal/L	3,8 à 6						19			2500

MAJ : 02-18
 Vérif. : N.P.L
 Appr. : C . P

Distribution OPINDUS



Matériel conforme à la législation européenne

OPINDUS : 1, Rue Maurice Audibert 69800 SAINT PRIEST Tél : 04.78.21.73.14 - Fax : 04.78.21.73.01