

OUTILS DE POSE HI-LOK

Visseuses d'angle à contrôle de couple et coupure pour fixations HI-LOK



Table 1

Tool Model Number	Max Torque		RPM	Tool Length	Tool Wt. (lbs.)	Hex Socket Sizes (A/F)										Hex Key Sizes		
	In-lbs	Nm				Convert fractional hex sizes to actual maximum decimal equivalents. Examples: 1/4" = .249, .250, .252 5/16" = .312, .313, .314												
KT310BA	79	9	430	10.5"	1.5	7/32	1/4	9/32	5/16							.078	.094	
KT310BB	130	15	360	12.1"	2.6	7/32	1/4	9/32	5/16							.094	.125	.156
KT310BC	250	28	340	13.8"	3.1	1/4	5/16	3/8	7/16	1/2						.125	.156	.187
KT310BD	370	42	400	17.2	4.4	5/16	3/8	7/16	1/2	9/16	5/8	3/4				.125	.156	.187
KT310BE	432	50	330	17.2	4.4	5/16	3/8	7/16	1/2	9/16	5/8	3/4				.125	.156	.187
KT310BF	490	57	280	17.8"	4.8	3/8	7/16	1/2	9/16	5/8	3/4					.156	.187	.219
KT310BG	600	70	225	19.2"	5.3	7/16	1/2	9/16	5/8	3/4	7/8	1.0				.156	.187	.219
KT310BH	730	85	190	20.9"	6.1	5/8	11/16	3/4	7/8	15/16	1.0	1-1/8	1-1/4			.219	.250	
KT310BK	1330	150	170	23.2"	7.6	5/8	11/16	3/4	7/8	15/16	1.0	1-1/8	1-1/4			.219	.250	

Notes:

- Actual hex socket size is the maximum A/F hex dimension of the specific fastener to be installed.
- (D) Specifies 12 Point Socket Configuration, Example: KTD310BC312G094T

Example of Complete Tool Model Number:

KT(D)310BH 562 L 219T

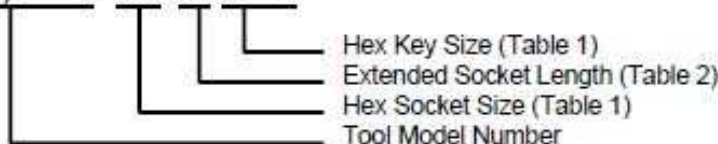


Table 2

Ext'd.Socket Length

Code	Extension
B	.250"
D	.500"
E	.625"
G	1.0"
J	2.0"
L	3.0"

Certain socket lengths are not available in all tools models

MAJ : 02-18
 Vérif. : N.P.L
 Appr. : C . P

Distribution OPINDUS



Matériel conforme à la législation européenne

OPINDUS : 1, Rue Maurice Audibert 69800 SAINT PRIEST Tél : 04.78.21.73.14 - Fax : 04.78.21.73.01